
Mercury Security MR52 Interface Module

Reader and IO interface module for up to 2 doors

Seamlessly integrated with the Genetec Synergis IP Access Control Solution

The Synergis™ system supports Mercury Security's open field hardware enabling organizations to deploy industry-standard access control modules and protect their investments for years to come. The MR52 two door interface module connects up to two readers, controlling either one or two doors. Supporting a range of wired and wireless reader technology, the MR52 is managed by a Mercury Security EP/LP1501, EP/LP1502, EP/LP2500 and EP/LP4502 controller through a high-speed RS-485 network and ultimately, the Synergis Cloud Link appliance over IP.

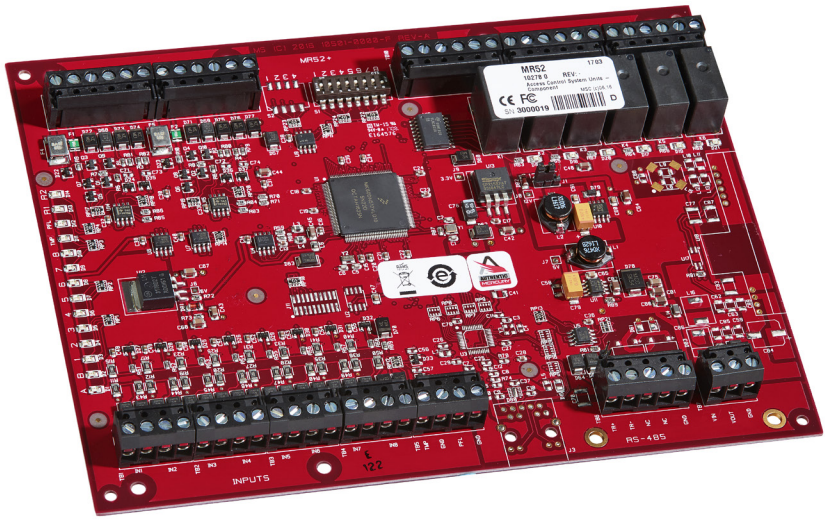

Mercury Security MR52 Interface Module

Synergis Cloud Link

The Synergis Cloud Link appliance is an intelligent and PoE-enabled micro-server that supports a mix of non-proprietary access control modules like the Mercury Security MR52 Interface Module connected to any Mercury Intelligent Controller over RS-485. Modernize your access control environment by deploying Synergis Cloud Link over your network and establish real-time connectivity to your doors.

Overview

- Connects to the Mercury Security controllers over high-speed RS-485 network.
- Reports all activity in real-time to Synergis Cloud Link and Mercury Security controllers
- Manages up to 4 OSDP readers or 2 doors
- Reports Supervised Inputs
- Some inputs can be configured as general purpose inputs
- UL 294 recognized components
- OSDP v1 and v2 supported

Available Interfaces

Readers:
2 reader ports, supporting
2 OSDP readers (entry and exit) each

Inputs:
8 general purpose: programmable circuit type
2 dedicated for Tamper and Power Monitor

Outputs:
6 relays: Form C, 5 Amp 30 Vdc

Platinum Elite
MERCURY


Choose the Synergis IP access control solution to protect your people and assets with your choice of widely-deployed, non-proprietary, and secure access control hardware.

Hardware specifications

Dimensions	6.0 in × 8.0 in × 1.0 in (152 mm × 203 mm × 25 mm)
Operating Temperature	0-70°C operational, -55-85°C storage
Communications Ports	RS–485, 2-wire, 4,000’
Certifications	UL 294 Recognized, CE Compliant, RoHS, EN-60839-11-1
Warranty	24-month warranty. Please refer to Genetec Sales Policy for more information

Architecture

Connected to the any Mercury Intelligent Controller over RS-485 and ultimately the Synergis Cloud Link appliance over IP, the Mercury MR52 Reader Module processes real-time commands and reports all activities upstream.

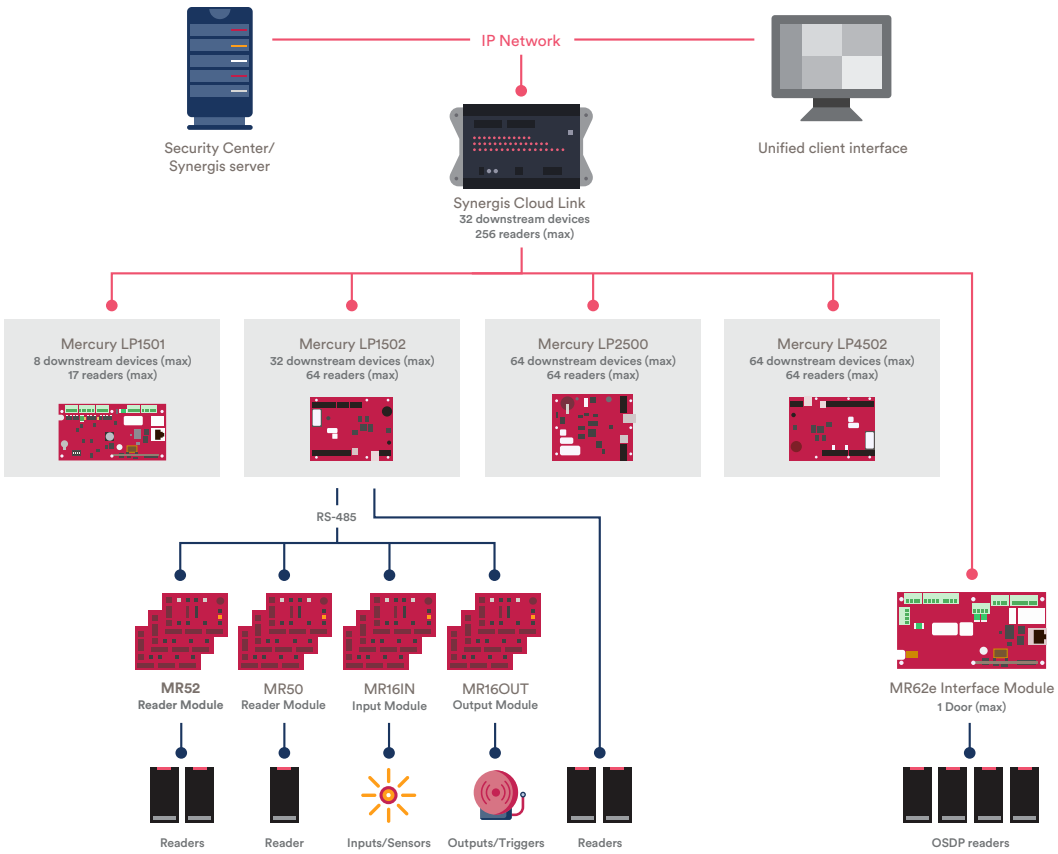

Genetec Inc.
genetec.com/locations
info@genetec.com
@genetec

© 2022 Genetec, Inc. All rights reserved. Genetec, the Genetec logo, Syngergis and Syngergis Cloud Link are either registered trademarks or trademarks of Genetec. All other trademarks contained herein are the property of their respective owners.